





Terminals

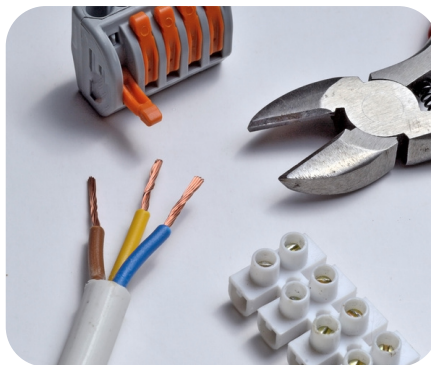

Material : Copper
Plating : Tin

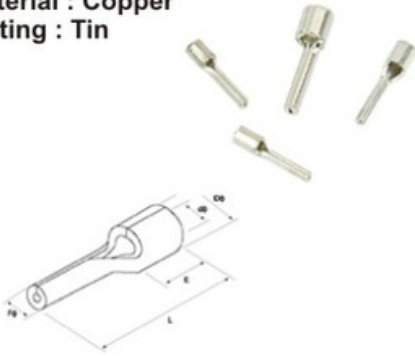

NON INSULATED PIN TERMINALS

ITEM No.	DIMENSION (MM)					PRICE LIST
	F mm	L mm	E mm	D mm	d mm	
CTPTN 1-13	1.9	17.8	4.8	3.4	1.7	2.11
CTPTN 1-18	1.9	22.8	4.8	3.4	1.7	2.50
CTPTN 2-13	1.9	17.8	4.8	4.1	2.3	2.50
CTPTN 2-18	1.9	22.8	4.8	4.1	2.3	2.81
CTPTN 5-13	2.8	20.0	6.8	6.0	3.4	4.85
CTPTN 5-18	2.8	24.8	6.8	6.6	3.4	5.30

Material : Copper
Plating : Tin
Insulation : PVC



INSULATED PIN TERMINALS

ITEM No.	DIMENSION (MM)					Color	PRICE LIST
	F mm	L mm	E mm	D mm			
CTPTV 1-13	1.9	23	10	4.3		Red	2.35
CTPTV 1-18	1.9	28	10	4.3		Red	2.69
CTPTV 2-13	1.9	23	10	4.9		Blue	2.71
CTPTV 2-18	1.9	28	10	4.9		Blue	3.00
CTPTV 5-13	2.8	27	12.5	6.7		Yellow	5.80
CTPTV 5-18	2.8	30.5	12.5	6.7		Yellow	6.40

Material : Copper
Plating : Tin
Insulation : PVC



INSULATED FLAT PIN TERMINALS

ITEM No.	DIMENSION (MM)				PRICE LIST
	W mm	L mm	F mm	C mm	
CTDBV 1-14	2.3	24	14	4.3	2.30
CTDBV 1-18	2.3	28	18	4.3	2.70
CTDBV 2-14	2.3	24	14	4.9	2.50
CTDBV 2-18	2.3	28	18	4.9	3.05
CTDBV 5-14	3.2	26.5	14	5.6	6.40
CTDBV 5-18	3.2	31.0	18	6.4	7.85

Material : Copper
Plating : Tin



NON INSULATED FLAT PIN TERMINALS


ITEM No.	DIMENSION (MM)						Wire Range		PRICE LIST
	W mm	F mm	L mm	E mm	D mm	D1 mm	AGW mm	Mm2 mm	
CTDBN 1-14	2.3	14	14.8	4.8	3.4	1.7	22-16	0.5-1.5	2.05
CTDBN 1-18	2.4	18	22.8	4.8	3.4	1.7	22-16	0.5-1.5	2.45
CTDBN 2-14	2.4	14	18.8	4.8	4.1	2.3	16-14	1.5-2.5	2.25
CTDBN 2-18	2.4	18	22.8	4.8	4.1	2.3	16-14	1.5-2.5	2.75
CTDBN 5-14	3.2	14	20	6	3.4	3.4	12-10	4-6	6.10
CTDBN 5-18	3.2	18	24	6	5.9	3.6	12-10	4-6	9.10

Wire Range- 0.5~1.5mm² (A.W.G. 22~16) I_{max} 19A

Wire Range- 1.5~2.5mm² (A.W.G. 16~14) I_{max} 27A

Wire Range- 4~6mm² (A.W.G. 12~10) I_{max} 48A

Material : Copper
Plating : Tin
Insulation : PVC

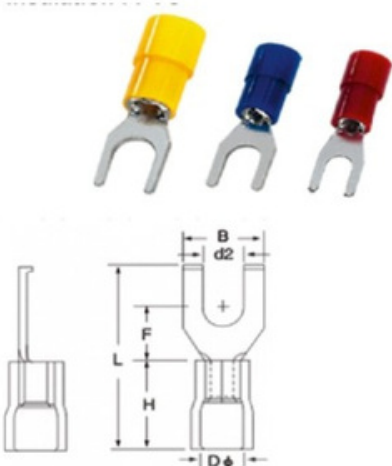

INSULATED SPADE / FORK TERMINALS

ITEM No.	STUD	WIRE SIZE	d2	B(MM)	L(mm)	F(mm)	H(mm)	D(mm)	COLOR	PRICE LIST
CTSV 1-3	#4	0.5-1.5	3.2	5.7	21.2	6.5	10.0	4.3		2.21
CTSV 1-4	#8	0.5-1.5	4.3	6.7	21.2	6.5	10.0	4.3		2.30
CTSV 1-5	#10	0.5-1.5	5.3	8.1	21.2	6.5	10.0	4.3		2.47
CTSVL 1-6	1/4	0.5-1.5	6.5	9.5	21.2	6.5	10.0	4.3		2.99
CTSVL 1-8				ON DEMAND						4.65
CTSV 2-3	#4	1.5-2.5	3.2	5.7	21.2	6.5	10.0	4.3		4.51
CTSVS 2-4	#8	1.5-2.5	4.3	6.4	21.2	6.5	10.0	4.3		2.55
CTSVL 2-5	#8	1.5-2.5	4.3	8.1	21.2	6.5	10.0	4.3		2.75
CTSVL 2-6	#1/4	1.5-2.5	6.5	9.5	27.2	6.5	10.0	4.3		2.95
CTSV 5-4	#8	4-6	4.3	8.0	24.8	7	12.5	6.2		4.30
CTSVL 5-5	#10	4-6	5.3	8.0	24.8	7	12.5	6.2		4.60
CTSVS 5-6	1/4	4-6	6.5	12.0	28.0	12.1	12.5	6.2		4.999
CTSV 8-5	5/16	10.0	5.3	10.5	30.5	8.1	12.5	7.2		9.30


Material : Copper
Plating : Tin



NON INSULATED SPADE / FORK TERMINALS

ITEM No.	WIRE SIZE (mm2) I _{max}	MATERIAL PURPLE COPPER								PRICE LIST
		STUD	D2(mm)	B(MM)	L(mm)	F(mm)	E(mm)	D(mm)	d(mm)	
CTSNB 1-3	0.5-1.5	#4	3.2	5.7	16	6.5	4.8	3.4	1.7	1.81
CTSNB 1-4	0.5-1.5	#8	4.3	6.4	16	6.5	4.8	3.4	1.7	1.95
CTSNB 1-5	0.5-1.5	#10	5.3	8.1	16	6.5	4.8	3.4	1.7	2.15
CTSNB 1-6	0.5-1.5	1/4	6.4	9.5	16	6.5	4.8	3.4	1.7	3.45
CTSNB 2-3	1.5-2.5	#4	3.2	5.7	16	6.5	4.8	4.1	2.3	1.81
CTSNB 2-4	1.5-2.5	#8	4.3	6.4	16	6.5	4.8	4.1	2.3	1.95
CTSNB 2-5	1.5-2.5	#10	5.3	8.1	16	6.5	4.8	4.1	2.3	2.35
CTSNB 2-6	1.5-2.5	#1/4	6.5	9.5	16	6.5	4.8	4.1	2.3	2.75
CTSNB 5-4	4-6	#8	4.3	8	18.3	7	6	5	3	3.95
CTSNB 5-5	4-6	#10	5.3	8	18.3	7	6	5	3	4.15
CTSNB 5-6	4-6	#1/4	6.5	12	21.5	12.1	6	5	3	4.75
CTSNB 8-5	4-6	5/16	5.3	14	20.8	8.1	8.5	7.2	4.5	11.61

Material : Copper
Plating : Tin
Insulation : PVC

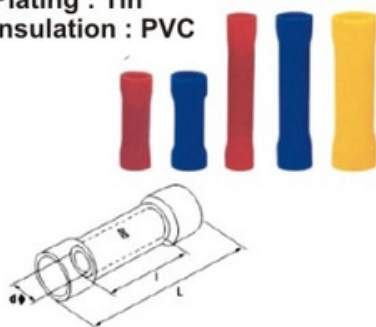

INSULATED INLINE/BUTT TERMINALS


DIMENSION (MM)								PRICE LIST
ITEM No.	A.W.G.	mm2	B	d	L	1max	Color	
CTBV-1	22-16	0.5-1.5	15.0	1.7	26.0	19A		3.10
CTBV-2	16-14	1.5-2.5	15.0	2.3	26.0	27A		3.30
CTBV-5	12-10	4-6	15.0	3.4	26.0	48A		5.80
CTBV-8	#8	6-10	21.0	4.5	35.0	62A		21.00

Wire Range- 0.5~1.5mm² (A.W.G. 22~16) I_{max} 19A

Wire Range- 1.5~2.5mm² (A.W.G. 16~14) I_{max} 27A

Wire Range- 4~6mm² (A.W.G. 12~10) I_{max} 48A

Material : Copper
Plating : Tin
Insulation : PVC

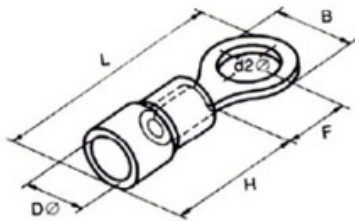


INSULATED RING TERMINALS

ITEM No.	WIRE SIZE (mm ²)	MATERIAL PURPLE COPPER								PRICE LIST
		STUD	d2(mm)	B(MM)	L(mm)	F(mm)	H(mm)	D(mm)	COLOR	
CTRV 1-3	0.5-1.5	#4	3.2	5.7	17.8	4.95	10	4.3		2.30
CTRV 1-4	0.5-1.5	#8	4.3	6.6	20.1	6.3	10	4.3		2.40
CTRV 1-5	0.5-1.5	#10	5.3	8.0	21.5	7.0	10	4.3		2.45
CTRV 1-6	0.5-1.5	#1/4	6.5	11.6	27.5	11.1	10	4.3		3.20
CTRV 1-8	0.5-1.5	5-16"	8.4	11.6	26.8	11.0	10	4.3		4.60
CTRV 1-10	0.5-1.5	3-8"	10.5	11.6	30.5	13.6	10	4.3		4.80
CTRV 1-12	0.5-1.5	1-2"	13.0	11.6	35.4	19.9	10	4.3		5.70
CTRV 2-3	1.5-2.5	#4	3.2	6.6	17.8	4.3	10	4.3		2.45
CTRV 2-4	1.5-2.5	#8	4.3	6.6	21	7	10	4.9		2.60
CTRV 2-5	1.5-2.5	#10	5.3	8.5	22.5	7.75	10	4.9		3.10
CTRV 2-6	1.5-2.5	#1/4	6.5	12	27.6	11	10	4.9		3.55
CTRV 2-8	1.5-2.5	5-16"	8.2	11.0	26.8	26.8	10	4.9		4.55
CTRV 2-10	1.5-2.5	3-8"	10.5	13.9	30.8	30.5	10	4.9		4.85
CTRV 2-12	1.5-2.5	1-2"	13.0	16.0	35.4	35.4	10	4.9		5.75
CTRV 5-4	4-6	#8	4.3	8	24.5	7.7	12.5	6.2		4.10
CTRV 5-5	4-6	#10	5.3	12	27.9	7.7	12.5	6.2		5.15
CTRV 5-6	4-6	#1/4	6.5	12.5	27.9	7.7	12.5	6.2		5.15
CTRV 5-8	4-6	5-16"	8.2	14.0	30.5	10.5	13.0	6.4		7.35
CTRV 5-10	4-6	3-8"	10.5	15.0	34.0	13.3	13.0	6.4		9.30
CTRV 5-12	4-6	1/2	13	19.2	38.1	16	13.0	6.7		10.60
CTRV 8-5	10-16	#10	5.2	8.8	26.1	10.5	16.0	6.4		11.90
CTRV 8-6	10-16	1/4"	6.3	12.0	26.1	9.3	16.0	6.4		11.90
CTRV 8-8	10-16	5/16"	8.3	14.8	33.5	11.7	15.3	7.0		14.35
CTRV 8-10	10-16	13/32"	10.3	14.8	33.5	11.7	15.3	7.0		17.60
CTRV 14-6		ON DEMAND								19.90
CTRV 14-10		ON DEMAND								20.25
CTRV 22-8		ON DEMAND								30.60


NON INSULATED RING TERMINALS

ITEM No.	WIRE SIZE (mm ²) I _{max}	MATERIAL PURPLE COPPER								PRICE LIST
		STUD	d2(mm)	B(MM)	F(mm)	L(mm)	E(mm)	D(mm)	d(mm)	
CTRNB 1-3	0.5-1.5	#4	3.2	5.5	5.0	12.5	4.8	3.4	1.7	1.88
CTRNB 1-4	0.5-1.5	#8	4.1	6.6	6.3	13.8	4.8	3.4	1.7	1.90
CTRNB 1-5	0.5-1.5	#10	5.1	8.0	7.0	15.8	4.8	3.4	1.7	2.05
CTRNB 1-6	0.5-1.5	#1/4	6.4	11.0	11.0	20.1	4.8	3.4	1.7	2.55
CTRNB 1-8	0.5-1.5	5-16"	8.2	11.5	11.0	21.7	4.8	3.4	1.7	3.20
CTRNB 1-10	0.5-1.5	3-8"	10.5	13.6	13.5	25.5	4.8	3.4	2.3	3.90
CTRNB 1-12	0.5-1.5	1-2"	13.0	19.2	16	30.4	4.8	3.4	2.3	4.80
CTRNB 2-3	1.5-2.5	#4	3.1	6.5	4.8	13.1	6.8	4.1	2.3	1.85
CTRNB 2-4	1.5-2.5	#8	4.1	6.5	6.3	14.2	6.8	4.1	2.3	1.95
CTRNB 2-5	1.5-2.5	#10	5.1	8.5	7.4	16.2	6.8	4.1	2.3	2.10
CTRNB 2-6	1.5-2.5	#1/4	6.4	11.4	11	21.6	6.8	4.1	2.3	3.05
CTRNB 2-8	1.5-2.5	5-16"	8.4	12.0	11	21.6	6.8	4.1	3.4	3.75
CTRNB 2-10	1.5-2.5	3-8"	10.5	13.6	13.9	25.5	6.8	4.1	3.4	4.15
CTRNB 2-12	1.5-2.5	1-2"	13.0	19.2	16.0	30.4	6.8	5.6	3.4	4.98
CTRNB 5-4	4-6	#8	4.0	7.2	6.1	15.7	6.8	5.6	3.4	3.70
CTRNB 5-5	4-6	#10	5.3	9.5	8.3	19.0	6.8	5.6	3.4	4.30
CTRNB 5-6	4-6	#1/4	6.4	11.5	10.5	21.7	6.8	5.6	4.5	4.45
CTRNB 5-8	4-6	5-16"	8.2	14.2	13.3	26.5	6.8	5.6	4.5	9.05
CTRNB 5-10	4-6	3-8"	10.5	15.0	13.3	27.0	6.8	5.6	4.5	9.65
CTRNB 5-12	4-6	1/2	13.0	19.2	16	32.4	6.8	5.6	4.5	10.05
CTRNB 8-5	6-10	#10	5.3	8.8	10.5	23.1	8.5	7.2	4.5	10.85
CTRNB 8-6	6-10	1/4"	6.4	12.0	9.3	29.8	8.5	7.2	4.5	13.40
CTRNB 8-8	6-10	3/8	10.5	15.0	13.8	33.5	8.5	7.2	4.5	13.75
CTRNB 8-10	6-10	1/2	13.0	20.0	15.0	29.8	8.5	7.2	4.5	14.55
CTRNB 8-12	6-10	#10	5.3	12.0	13.3	29.8	8.5	7.2	5.8	17.25
CTRNB 14-6	10-16	1/4	6.4	12.0	13.3	29.8	8.5	9.0	5.8	21.60
CTRV 14-8	10-16	5/16	8.2	12.0	13.3	32.8	10.5	9.0	5.8	22.10
CTRV 14-10	10-16	3/8	10.5	16.1	14.2	23.8	10.5	9.0	8.6	22.75
CTRV 22-6	16-25	1/4	6.4	12.2	15.1	32.6	12.0	11.5	8.6	32.90
CTRV 22-8	16-25	5/16	8.4	16.5	13.5	33.0	12.0	11.5	8.6	32.90

Material : Copper
Plating : Tin




Material : Copper
Plating : Tin
Insulation : PVC

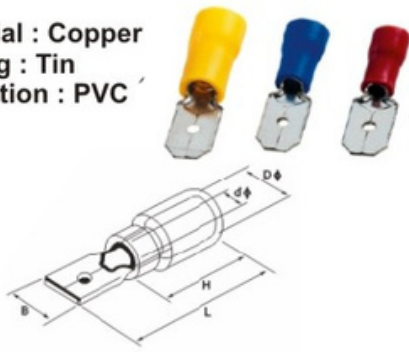

INSULATED MALE TERMINALS

DIMENSION								
ITEM No.	NEMA TAB mm	THICKNESS OF MATERIAL	B mm	d mm	D mm	L mm	H mm	PRICE LIST
CTMDD1-110(8)	0.8*2.8	0.8	2.8	1.70	4.3	17.7	10	2.05
CTMDD1-187(8)	0.8*4.75	0.8	4.75	1.70	4.3	18.5	10	2.45
CTMDD1-250	0.8*6.3	0.4	6.3	1.70	4.3	21.0	10	2.70
CTMDD2-250	0.8*6.3	0.4	6.3	1.70	4.3	21.0	10	2.80
CTMDD5-250	0.8*6.3	0.4	6.3	3.4	5.7	25	14	5.20

Material : Copper
Plating : Tin
Insulation : PVC

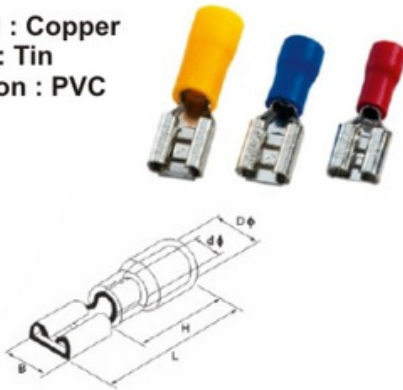

INSULATED FEMALE TERMINALS

DIMENSION								
ITEM No.	NEMA TAB mm	THICKNESS OF MATERIAL	B mm	d mm	D mm	L mm	H mm	PRICE LIST
CTFDD1.25-110	0.8*2.8	0.3	3.8	1.7	3.8	19.0	10	2.05
CTFDD1.25-187	0.8*4.75	0.35	5.6	1.7	3.8	19.0	10	2.20
CTFDD1.25-250	0.8*6.35	0.4	7.4	1.7	3.8	21.0	10	2.70
CTFDD2-187	0.8*6.35	0.4	7.4	2.3	4.3	21.0	10	3.05
CTFDD2-250	0.8*6.35	0.4	7.4	3.4	5.7	25.0	14	2.85
CTFDD5-250	0.8*6.35	0.4	7.4	3.4	5.7	25.0	14	5.55
CTFDD5-375	0.8*6.35	0.4	7.4	3.4	5.7	25.0	14	5.60
CTTDD2-250	0.8*6.35	0.4	7.4	3.4	5.7	25.0	14	1.00


Material : Copper
Plating : Tin
Insulation : PVC



INSULATED PIGGY BANK TERMINALS

DIMENSION									
ITEM No.	NEMA TAB mm	WIRE SIZE I _{max}	B mm	B1 mm	H mm	D mm	d mm	L mm	PRICE LIST
CTPBDD 1.25-250	0.8*6.35	0.5-1.5, 10A	7.4	6.3	10.0	3.8	1.7	21.5	4.45
CTPBDD 2-250	0.8*6.35	0.5-1.5, 10A	7.4	6.3	10.0	4.3	2.3	21.5	4.50
CTPBDD 5-250	0.8*6.35	4-6, 24A	7.4	6.3	14.0	5.7	3.4	25	6.05

Material : Copper
Plating : Tin
Insulation : PVC

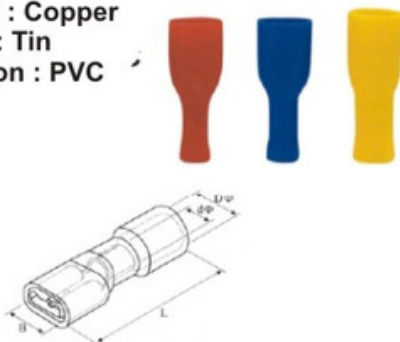

FULLY INSULATED FEMALE TERMINALS

DIMENSION							
ITEM No.	NEMA TAB mm	WIRE SIZE I _{max}	W mm	B mm	D mm	L mm	PRICE LIST
CTFDFD1-110(8)	0.8*2.8	0.5-1.5, 10A	6.2	3.2	4.0	20	3.15
CTFDFD1-1187(8)	0.8*4.75	0.5-1.5, 10A	7.8	5.0	4.0	20	3.15
CTFDFD1-250	0.8*6.3	0.5-1.5, 10A	9.3	6.6	4.0	22.5	3.50
CTFDFD2-250	0.8*6.3	1.5-2.5, 15A	9.3	6.6	4.5	24	3.60
CTFDFD5-250	0.8*6.3	4-6, 24A	9.3	6.6	5.7	25.5	6.60

Material : Copper
Plating : Tin
Insulation : PVC



INSULATED MALE BULLET TERMINALS

DIMENSION									
ITEM No.	THICKNESS OF MATERIAL	b	F	D	d	H	L	COLOR	PRICE LIST
		mm	mm	mm	mm	mm	mm		
CTMPD1-156	0.4	4	11.0	2.7	1.7	10	21	Red	2.70
CTMPD2-156	0.4	4	16.0	3.3	2.3	10	21	Blue	2.70
CTMPD5-156	0.4	4	11.0	4.5	3.4	14	25	Yellow	5.10


Material : Copper
Plating : Tin
Insulation : PVC



INSULATED FEMALE RECEPTACLE

DIMENSION									
ITEM No.	THICKNESS OF MATERIAL	b	B	D	d	F	L	COLOR	PRICE LIST
		mm	mm	mm	mm	mm	mm		
CTFRD1-156	0.4	4.0	7.7	2.7	1.7	7.3	23	Red	3.65
CTFRD2-156	0.4	4.0	7.7	3.3	2.3	7.3	23.8	Blue	3.75
CTFRD5-156	0.4	4.0	7.7	4.5	3.4	7.3	25.5	Yellow	6.40

Material : Nylon
Inside Material : Spring Steel



SCREW WIRE END TERMINALS

DIMENSION (MM)							PRICE LIST
ITEM No.	CABEL SIZE	B	C	L	COLOR		
CTWN1	Min.0.75x1+0.5x1, Max1.5x2	8.5	6.7	15	Grey		2.40
CTWN2	Min.0.75x3,Max1.5x3	10.1	7.4	17.5	Blue		2.90
CTWN3	Min.0.75x3,Max1.5x3+1	12.6	9.9	22.1	Orange		3.60
CTWN4	Min.0.25x1+0.75x1, 2.5x4+0.75x1	13.7	10	24.5	Yellow		4.20
CTWN6	Min.0.25x2,Max6x2+4x2	16	13	26.5	Red		6.80

Material : Nylon
Inside Material : Copper/Aluminium




CLOSED END TERMINALS

DIMENSION (MM)											PRICE LIST
ITEM No.	A.W.G.	mm2	C	E	L	F	B	Q	D	COLOR	
CTCE 1	22-16	0.5-1.5	2.55	7.0	15.3	6.3	9	5	9	White	1.60
CTCE 2	16-14	1.5-2.5	3.1	7.0	18.3	8.3	10	5.7	9.1	White	1.80
CTCE 5	12-10	4-6	5.3	7.0	20.0	10	10	8	12	White	2.90
CTCE 8	6	6	7.5	8	25.6	15	10	7	13.5	White	3.60


CORD END TERMINALS

Material : Copper +
Flame Retardant Tube
Plating : Tin



A. W. G. (mm2)	ITEM No.	DIMENSION (MM)							PRICE LIST
		F	L	W	B	D	C	COLOR	
22 A.W.G / 0.5mm2	CTE0508	8.0	14.5	3.3	4.4	1.3	1.0		0.45
22 A.W.G / 0.5mm2	CTE0510	10.0	16.5	3.3	4.4	1.3	1.0		0.45
22 A.W.G / 0.5mm2	CTE0512	12.0	18.5	3.3	4.4	1.3	1.0		0.55
20 A.W.G / 0.75mm2	CTE7508	8.0	14.9	3.5	6.6	1.5	1.2		0.45
20 A.W.G / 0.75mm2	CTE7510	10.0	16.9	3.5	6.6	1.5	1.2		0.45
20 A.W.G / 0.75mm2	CTE7512	12.0	18.9	3.5	6.6	1.5	1.2		0.65
18 A.W.G / 1.0mm2	CTE1008	8.0	14.8	3.7	6.6	1.8	1.2		0.45
18 A.W.G / 1.0mm2	CTE1010	10.0	16.8	3.7	6.6	1.8	1.2		0.47
18 A.W.G / 1.0mm2	CTE1012	12.0	18.6	3.7	6.6	1.8	1.2		0.57
16 A.W.G / 1.5mm2	CTE1508	8.0	15.1	4.4	7.4	2.0	1.4		0.63
16 A.W.G / 1.5mm2	CTE1510	10.0	17.6	4.4	7.4	2.0	1.4		0.71
16 A.W.G / 1.5mm2	CTE1512	12.0	19.6	4.4	7.4	2.0	1.4		0.75
14 A.W.G / 2.5mm2	CTE2508	8.0	15.8	4.8	7.4	2.6	2.1		0.65
14 A.W.G / 2.5mm2	CTE2510	10.0	17.4	4.8	7.4	2.6	2.1		0.71
14 A.W.G / 2.5mm2	CTE2512	12.0	19.7	4.8	7.4	2.6	2.1		0.80
14 A.W.G / 2.5mm2	CTE2518	18.0	25.3	4.8	7.4	2.6	2.1		1.05
12 A.W.G / 4.0mm2	CTE4010	9.0	17.3	5.6	8.3	3.2	2.8		1.05
12 A.W.G / 4.0mm2	CTE4012	12.0	20.5	5.6	8.3	3.2	2.8		1.20
12 A.W.G / 4.0mm2	CTE4018	18.0	26.3	5.6	8.3	3.2	2.8		1.41
10 A.W.G / 6.0mm2	CTE6012	12.0	21.1	6.9	9.1	3.9	3.5		1.47
10 A.W.G / 6.0mm2	CTE6018	18.0	26.5	6.9	9.1	3.9	3.5		1.65
8 A.W.G / 10mm2	CTE10-12	12.0	22.5	8.1	10.1	4.8	4.5		1.70
6 A.W.G / 16mm2	CTE16-12	12.0	22.5	9.5	10.4	6.2	5.8		2.70
6 A.W.G / 16mm2	CTE25-16	15.9	27.6	11.8	11.8	7.8	7.5		4.60
A.W.G / 35mm2	CTE35-18	16.2	29.9	13.3	13.6	8.7	8.3		8.10
A.W.G / 50mm2	CTE50-20	20.3	35.9	16.1	15.5	10.9	10.4		10.10

Material : Brass
Plating : Tin
Insulation : Nylon




NYLON INSULATED FLAG TERMINALS

ITEM No.	A.W.G	mm2	DIMENSION (MM)							PRICE LIST
			(NEMATAB)	W	F	L	D	1max	COLOR	
CTFLDNY1-187	22-18	0.5-1.5	0.5*4.75	5.0	7.0	15.0	1.7	10A		6.70
CTFLDNY1-250	22-18	0.5-1.5	0.8*6.35	6.6	7.6	16.0	1.7	10A		6.90
CTFLDNY2-187	16-14	1.5-2.5	0.5*4.75	5.0	7.0	15.2	2.3	15A		6.80
CTFLDNY2-250	16-14	1.5-2.5	0.8*6.35	6.6	7.6	16.0	2.3	15A		6.80
CTFLDNY5-250	12-10	4-6	0.8*6.35	7.0	7.6	17.5	3.4	24A		7.50


TWIN CORD END TERMINALS

Material : Copper +
Flame Retardant Tube
Plating : Tin



A. W. G. (mm2)	DIMENSION (MM)								PRICE LIST
	ITEM No.	F	L	W	B	D	C	COLOR	
2*22 A.W.G 2*0.5mm2	CTTE0508	8.0	14.5	5.0	6.5	1.8	1.3		0.88
2*22 A.W.G 2*0.5mm2	CTTE0510	10.0	16.5	5.0	6.5	1.8	1.3		0.95
2*20 A.W.G 2*0.75mm2	CTTE7508	8.0	15.3	5.5	7.3	2.1	1.6		0.88
2*20 A.W.G 2*0.75mm2	CTTE7510	10.	17.3	5.5	7.3	2.1	1.6		0.95
2*18 A.W.G 2*1.0mm2	CTTE1008	8.0	15.3	5.5	7.3	2.3	2.0		0.88
2*18 A.W.G 2*1.0mm2	CTTE1010	10.0	17.3	5.5	7.3	2.3	2.0		0.88
2*18 A.W.G 2*1.0mm2	CTTE1012	12.0	19.3	5.5	7.3	2.3	2.0		0.95
2*16 A.W.G 2*1.5mm2	CTTE1508	8.0	17.0	6.7	8.7	2.6	2.1		1.15
2*16 A.W.G 2*1.5mm2	CTTE1510	10.0	19.0	6.7	8.7	2.6	2.1		1.20
2*16 A.W.G 2*1.5mm2	CTTE1512	12.0	20.7	6.7	8.7	2.6	2.1		1.25
2*14 A.W.G 2*2.5mm2	CTTE2508	8.0	18.0	8.0	9.9	3.3	2.7		1.55
2*14 A.W.G 2*2.5mm2	CTTE2510	10.0	19.9	8.0	9.9	3.3	2.7		1.80
2*14 A.W.G 2*2.5mm2	CTTE2512	12.0	22.6	8.0	9.9	3.3	2.7		2.05
2*12 A.W.G 2*4mm2	CTTE4012	12.0	23.1	8.8	11.1	24.	3.8		2.15
2*10 A.W.G 2*6mm2	CTTE6014	12.0	23.1	9.5	12.1	5.3	4.9		2.80
2*8 A.W.G 2*10mm2	CTTE10-14	14.0	26.3	12.6	1.6	6.9	6.5		4.90
2*6 A.W.G 2*16mm2	CTTE16-14	14.0	26.3	19	17.3	8.7	8.3		6.70

Material : Brass
Plating : Tin
Insulation : Nylon



NYLON INSULATED MALE FEMALE TERMINALS

DIMENSION (MM)											PRICE LIST
ITEM No.	(NEMATAB)	W	F	L	B	D	d	(FIG)	mmsq	COLOR	
CTFDFNY1-250	0.8*6.35	6.6	7.3	22.0	11.0	4.0	1.7	1	0.5-1.5		5.60
CTMDFNY1-250	0.8*6.35	6.35	7.7	23.0	11.0	4.0	1.7	2	0.5-1.5		5.60
CTFDFNY2-250	0.8*6.35	6.6	7.3	22.0	11.0	4.5	2.3	1	1.5-2.5		5.70
CTMDFNY2-250	0.8*6.35	6.35	7.7	24.0	11.0	4.5	2.3	2	1.5-2.5		5.70
CTFDFNY5-250	0.8*6.35	6.6	7.7	24.0	13.0	6.3	3.4	1	4-6		6.10
CTMDFNY5-250	0.8*6.35	6.6	7.7	26.0	13.0	6.3	3.4	2	4-6		6.10



Contact Us



Website

www.connectterminal.com



Phone

+91 9818211615, 9220944557-558



E-mail

sales@connectterminal.com



Address

G-13,C-58,Shahpuri Tower,
Behind Janak Cinema, Janakpuri
New Delhi - 110058

